


## 齿形链 Inverted tooth chains


### 外接触式齿形链 Flank contact silent chains

链号 GB	节距 Pitch	链宽 Chain width	销轴直径 Pin diameter	销轴长度 Pin length		孔中心到齿尖距离 Distance from hole center to tooth	链板高度 Plate depth	链板厚度 Plate thickness	导向型式 Guide type	片数 Number of pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
GB Chain No.	P	b <sub>1</sub> min	d <sub>2</sub> max	L max	Lc max	d <sub>2</sub> max	h <sub>2</sub> max	T max		Pt	Q <sub>min</sub>	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	mm	mm		mm	mm	kN/lbf	kN
CL06	9.525	13.5	3.95	18.5	20.0	5.3	10.0	1.5	外(Outside)	9	10.0/2272	11.2	0.60
		16.5		21.5	23.0				外(Outside)	11	12.5/2840	14.0	0.73
		19.5		24.5	26.0				外(Outside)	13	15.0/3409	16.8	0.85
		22.5		27.5	29.0				外(Outside)	15	17.5/3997	19.6	1.00
		28.5		33.5	35.0				内(Inside)	19	22.5/5114	25.2	1.26
CL08	12.700	19.5	5.08	24.5	26.0	7.0	13.4	1.5	外(Outside)	13	23.4/5318	26.2	1.15
		22.5		27.5	29.0				外(Outside)	15	27.4/6227	30.6	1.33
		25.5		30.5	32.0				外(Outside)	17	31.3/7114	35.0	1.50
		28.5		33.5	35.0				内(Inside)	19	35.2/8000	39.4	1.68
		34.5		39.5	41.0				内(Inside)	23	43.0/9772	48.1	2.04
		40.5		45.5	47.0				内(Inside)	27	50.8/11364	56.8	2.39
		46.5		51.5	53.0				内(Inside)	31	58.6/13318	65.6	2.74
		52.5		57.5	59.0				内(Inside)	35	66.4/15091	74.3	3.10
CL10	15.875	30.0	5.92	37.0	38.2	8.7	16.7	2.0	内(Inside)	15	45.6/10364	50.6	2.21
		38.0		45.0	46.2				内(Inside)	19	58.6/13318	65.0	2.80
		46.0		53.0	54.2				内(Inside)	23	71.7/16295	79.5	3.39
		54.0		61.0	62.4				内(Inside)	27	84.7/19250	94.0	3.99
		62.0		69.0	70.4				内(Inside)	31	97.7/22204	108.4	4.58
CL12	19.050	38.0	6.90	45.0	46.5	10.5	20.0	2.0	内(Inside)	19	70.0/15909	77.6	3.37
		46.0		53.0	54.5				内(Inside)	23	86.0/19545	95.4	4.08
		54.0		61.0	62.8				内(Inside)	27	102.0/23182	113.2	4.78
		62.0		69.0	70.8				内(Inside)	31	117.0/26591	129.8	5.50
		70.0		77.0	78.8				内(Inside)	35	133.0/30227	147.6	6.20
CL16	25.400	45.0	8.90	52.0	53.5	14.0	26.7	3.0	内(Inside)	15	111.0/25227	123.2	5.31
		51.0		58.0	59.5				内(Inside)	17	125.0/28409	138.7	6.02
		57.0		64.0	65.5				内(Inside)	19	141.0/32045	156.5	6.37
		69.0		76.2	77.7				内(Inside)	23	172.0/39091	190.9	8.15
		81.0		88.2	89.7				内(Inside)	27	203.0/46163	225.3	9.57
		93.0		100.2	101.7				内(Inside)	31	235.0/53409	260.8	10.98
CL20	31.750	57.0	10.84	66.6	69.6	17.5	33.4	3.0	内(Inside)	19	165.0/37500	183.1	8.42
		69.0		78.6	81.6				内(Inside)	23	201.0/45681	223.1	10.19
		81.0		90.6	93.6				内(Inside)	27	237.0/53863	263.2	11.96
		93.0		102.6	105.6				内(Inside)	31	273.0/62045	303.0	13.73
		105.0		114.6	117.6				内(Inside)	35	310.0/70454	341.0	15.50
		117.0		126.6	129.6				内(Inside)	39	346.0/78636	380.6	17.27

内导式  
Middle guide

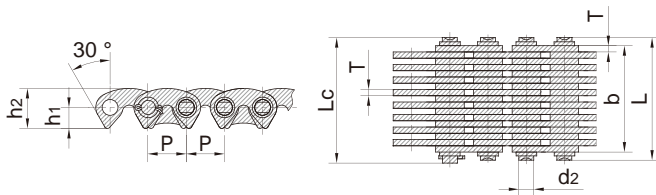

外导式  
Side guide

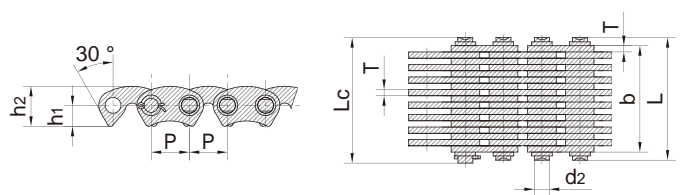

## 齿形链 Inverted tooth chains

### 内接触式齿形链 Crotch contact silent chains

链号 TSI	节距 Pitch	链宽 Chain width	销轴直径 Pin diameter	销轴长度 Pin length		孔中心到齿尖距离 Distance from hole center to tooth	链板高度 Plate depth	链板厚度 Plate thickness	导向型式 Guide type	片数 Number of pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
TSI Chain No.	P	b <sub>1</sub> min	d <sub>2</sub> max	L max	Lc max	d <sub>2</sub> max	h <sub>2</sub> max	T max		Pt	Q <sub>min</sub>	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	mm	mm		mm	kN/lbf	kN	kg/m
C4-120	12.7	19.5	5.08	24.5	26.0	6.62	12.1	1.5	内(Inside)	13	20.0/4545	22.2	1.20
C4-123		22.5		27.5	29.0				内(Inside)	15	23.0/5227	25.5	1.37
C4-129		28.5		33.5	35.0				内(Inside)	19	28.5/6477	31.6	1.72
C4-132		31.5		36.5	38.0				内(Inside)	21	31.5/7159	34.9	1.89
C4-138		37.5		42.5	44.0				内(Inside)	25	38.0/8636	42.1	2.22
C4-150		49.5		54.5	56.0				内(Inside)	33	50.0/11363	55.5	2.90
C4-320	12.7	19.5	5.08	24.5	26.0	6.62	12.1	1.5	外(Outside)	13	20.0/4545	22.2	1.21
C4-323		22.5		27.5	29.0				外(Outside)	15	23.0/5227	25.5	1.38
C4-329		28.5		33.5	35.0				外(Outside)	19	28.5/6477	31.6	1.73
C4-332		31.5		36.5	38.0				外(Outside)	21	31.5/7159	34.9	1.90
C4-338		37.5		42.5	44.0				外(Outside)	25	38.0/8636	42.1	2.23

内导式  
Middle guide

外导式  
Side guide

